
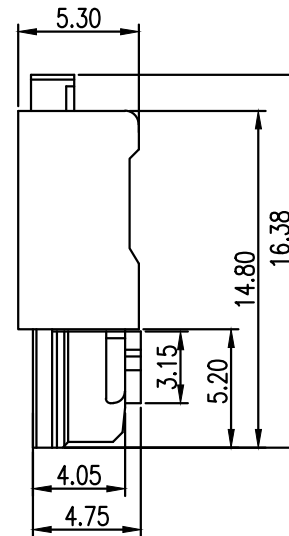
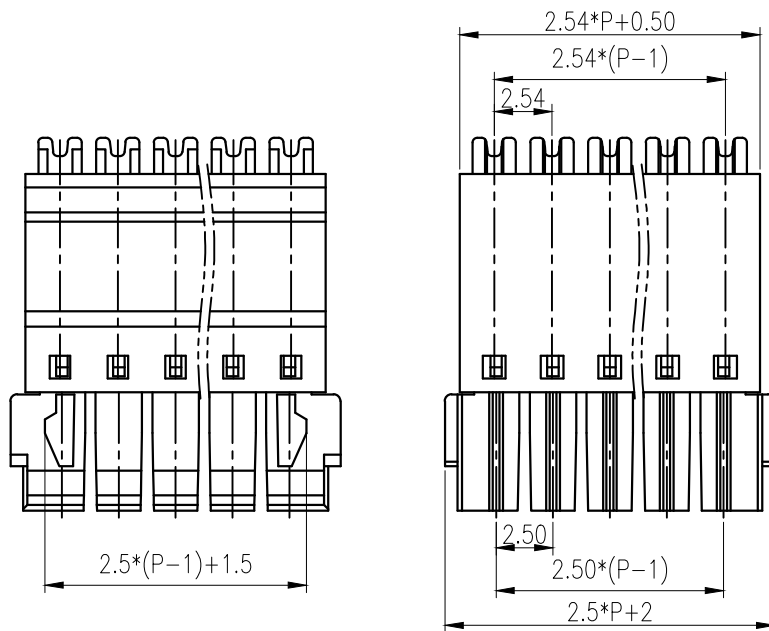


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		

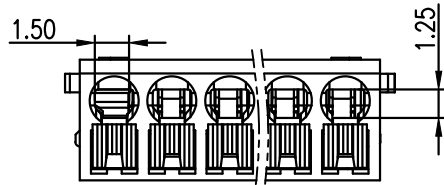

技术要求:
 间距: 2.54mm
 额定电流: 6 A
 额定电压: 160 V
 耐电压值: AC 2000V/min
 位数: 2~12
 连接方式: 直插式弹簧连接
 可连接导线横截面 AWG / kcmil 26~20
 硬导线横截面 $0.14 \text{ mm}^2 \sim 1.0 \text{ mm}^2$
 柔性导线横截面 $0.14 \text{ mm}^2 \sim 0.5 \text{ mm}^2$
 带不含绝缘套管的冷压头 $0.25 \text{ mm}^2 \sim 0.34 \text{ mm}^2$
 带套管, 带塑料绝缘套管 $0.14 \text{ mm}^2 \sim 0.25 \text{ mm}^2$
 剥线长度: 7 mm
 使用条件: $-40^\circ\text{C} \sim +105^\circ\text{C}$

拔出测试
 导线横截面 / 导线类型 / 拉力
 0.14 mm^2 / 刚性 / $> 10 \text{ N}$
 0.14 mm^2 / 柔性 / $> 10 \text{ N}$
 0.5 mm^2 / 刚性 / $> 20 \text{ N}$
 0.5 mm^2 / 柔性 / $> 20 \text{ N}$

每个接线位的插入强度 2 N
 每个接线位的拔出强度 2 N

	pitch dimension			Nominal dimension					— /
	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
variable range	to 6	to 10	to 24	to 30	to 60	to 100	to 150		□ ○
Tolerance	± 0.1	± 0.15	± 0.25	± 0.2	± 0.3	± 0.5	± 0.7	± 1.0	0.05/10

5	LC8-2.54弹片	1169B0002AV	P	不锈钢	
4	LC8-2.54夹子	1169B0001AV	P	磷青铜	镀亮锡
3	LC8按钮	1169D0Y01AV	P	PA66	
2	LC8-2.5-XH盖板	LC8-2.5-XH盖板	1	PA66	
1	LC8-2.54主体	1169A0YXXAV	1	PA66	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	CMZ	DATE 26/01/21	UNITS	mm	THIRD ANGLE PROJECTION
CHK.		DATE	SIZE	A4	SHEET 1 of 1
APP.		DATE	SCALE	1:1	DWG NO. SP-2-1169001 REV: V0
上海联捷电气有限公司 Shanghai Elinker Electric CO.,LTD				TITLE	LC8XH-2.54-XXP-1Y-00A LC8XH-2.54-成品