
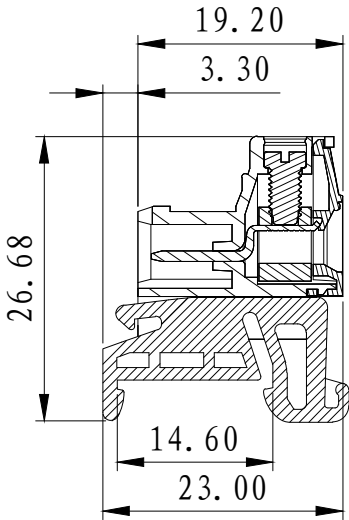
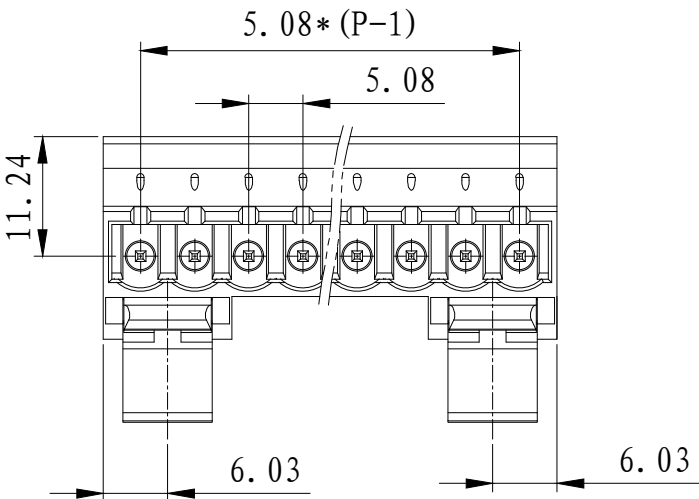


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		

NOTES:
Pitch : 5.08mm
Rated Voltage : 300V
Rated Current : 15A
Withstand Voltage :
AC2500V for 1 minute
Insulation Resistance :
500MΩ / DC500V
Using Temperature Range :
- 40℃ ~ + 105℃
Wire range : 24~12 AWG
Screw Torque Value : 0.8Nm
Ploe:2-24

技术要求:
间距: 5.08mm
额定电压: 300V
额定电流: 15A
耐电压值: AC2500V/min
绝缘阻抗: 500MΩ/DC500V
使用条件: -40℃ ~+105℃
适用线规: 24~12 AWG
螺丝扭矩: 0.8 Nm
极数: 2~24P

6	LC10-5.08-焊脚	1011B0001AV	P	紫铜	镀雾锡
5	LC1-5.08-螺丝	SP0YA305301V	p	碳钢	三价铬钝化彩锌
4	LC1-5.08-铜方块	F1A0BLC5083V	P	黄铜	镀镍
3	LC1-5.08-盖板	1001C0YXXAV	1	PA66-V0	
2	LC15-5.08脚	1067T0Y00AV		PA66-V0	
1	LC16-5.08本体	1045A0YXXAV	1	PA66-V0	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	ARKINE	DATE 2013/01/30	UNITS mm	THIRD ANGLE PROJECTION	
CHK.		DATE	SIZE A4		SHEET 1 of 1
APP.		DATE	SCALE 1:1	DWG NO.	SP-2-1045A01 REV: V0
 上海有乐电气有限公司 Shanghai YouLe Electric CO., LTD				TITLE	LC15-5.08-XXP-140-00A LC15-5.08-成品

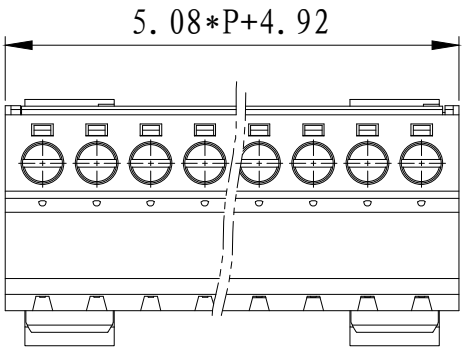

	pitch dimension			Naminal dimension					
variable range	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150		 
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10