

REVISION RECORD			
REV.	CONTENT	MOD.	DATE

技术要求:

极数: 组装

额定电压: 660V


额定电流: 150A

螺钉类型/扭力: M8/3. 5N. m



绝缘材料类型: PC

阻燃等级: V0

刚柔性导线: 50mm²

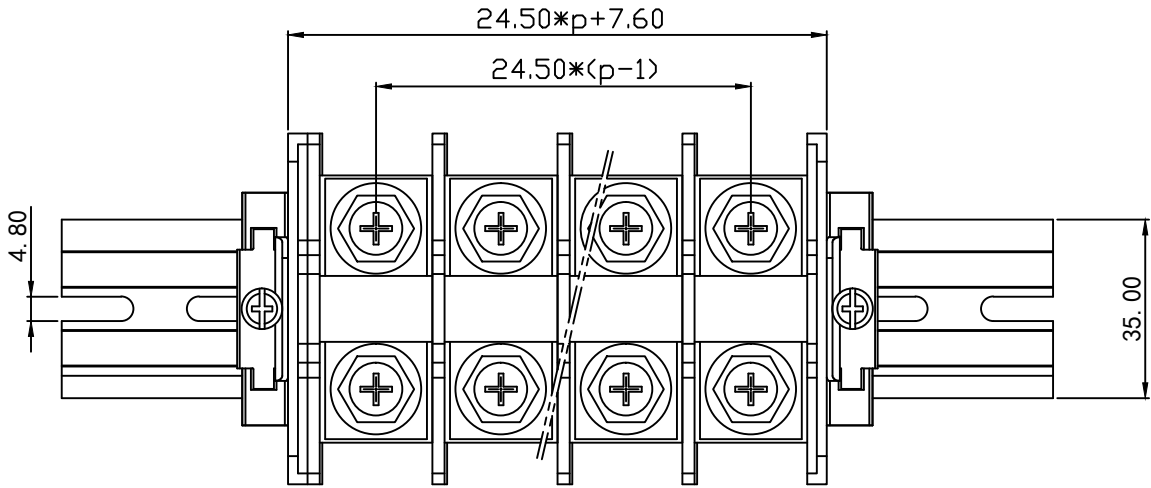

备注: 端子上面有透明(防护罩)

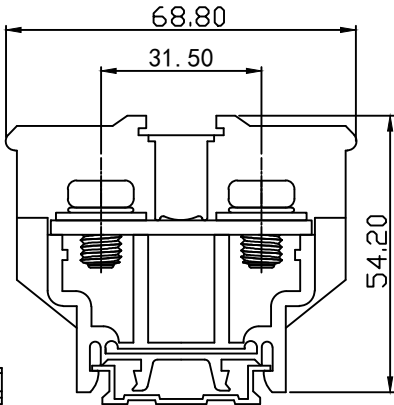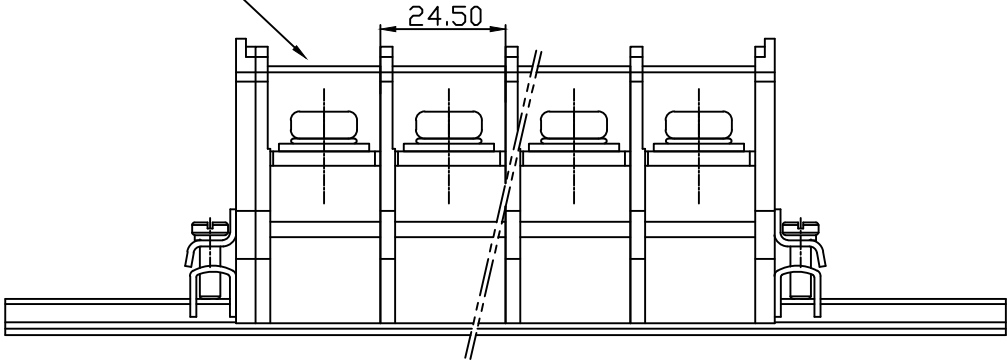

备注XX代表位数

	pitch dimension			Naminl dimension					— /
	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	
variable range	0 to 6	6 to 10	10 to 24	0 to 30	30 to 60	60 to 100	100 to 150	150	— /
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

5	DG-L-C45/2米	6JH9LDG0001V	1	铝	
5	JHY1-150A罩盖	6043C000100	1	PC	透明
4	IN100BK-螺丝	SSD0800030V	2P	碳钢	镀锌
3	JHY1-150A导电件	6043B00010V	P	黄铜	镀镍
2	JHY1-150A端板	6043C3001AV	2	PC	黑色
1	JHY1-150A本体	6043A3001AV	P	PC	黑色
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	CMZ	DATE 2026/06/02	UNITS	mm	THIRD ANGLE PROJECTION
CHK.		DATE	SIZE	A4	
APP.		DATE	SCALE	1:1	DWG NO. SP-2-6043001 REV: T0
 上海联捷电气有限公司 Shanghai Elinker Electric CO.,LTD				TITLE	JHY1-150XX JHY1-150A-成品