
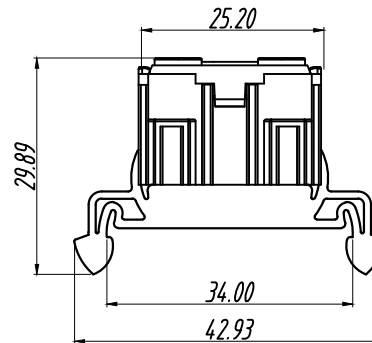
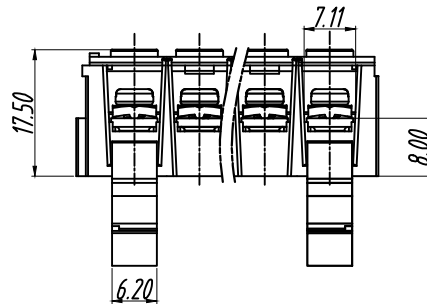


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		

NOTES:
 Pitch : 9.0mm
 Rated Voltage : 600V
 Rated Current : 15A
 Withstand Voltage :
 AC3000V for 1 minute
 Using Temperature Range :
 - 40 ~ + 105
 Suitable Electric Wire: 22-16 AWG
 Screw Torque Value : M3/0.5Nm

技术要求:
 间距: 9.0mm
 额定电压: 600V
 额定电流: 15A
 耐电压值: AC3000V/min
 使用条件: -40°C~+105°C
 适用线规: 22-16 AWG
 螺丝扭矩: M3/0.5Nm

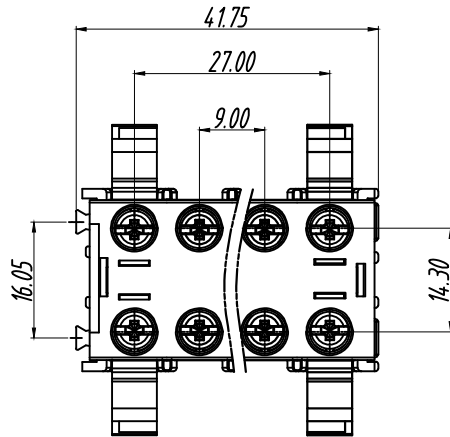

	pitch dimension			Nominal dimension					— □ ⌒
	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	
variable range									
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

6	KJ2452-卡脚	6TB1J300153V	2	PA66-V0	黑色
5	TB1-15A-白条		1	A4腹膜纸	
4	3.7*6.5*6.5三价五彩盐雾过48小时	3.7*6.5*6.5三价五彩盐雾过48小时	2P	合金铜	镀镍
3	JH9-15A-导电件	6TB1BDD015AV	P	黄铜	镀镍
2	TB1-15-H-盖板	6TB1C701050V-H	1	PC	透明
1	TB1-15-H-本体	6TB1E301050V-H	1	PC	黑色
NO.	NAME OF PART	NO. OF PART	QTY	MATERIAL	NOTES
DES.	CMZ	DATE	2026/06/09	UNITS	mm
CHK.		DATE		SIZE	A4
APP.		DATE		SCALE	
 上海联捷电气有限公司 Shanghai Elinker Electric CO.,LTD				TITLE	TB1-15XX-H-1Y-00A TB1-15A-H-成品