
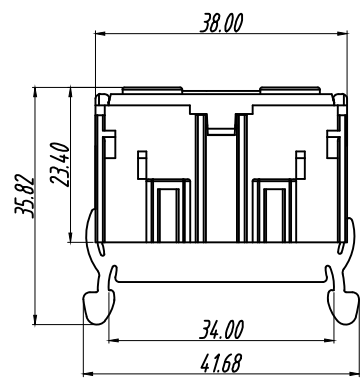
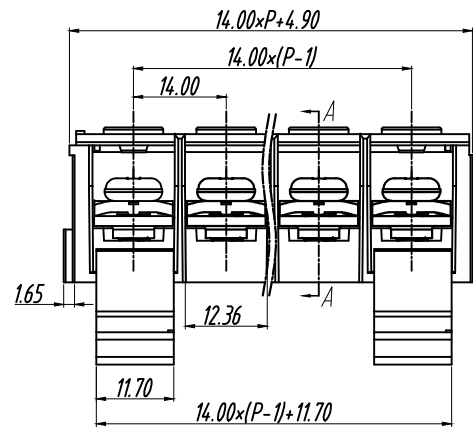


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		

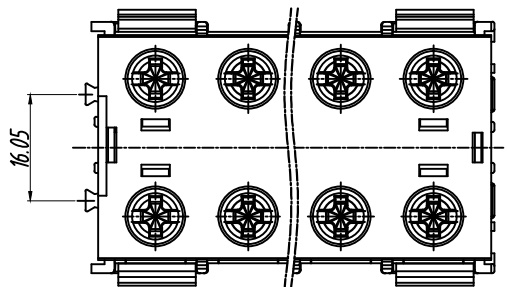

NOTES:
Pitch : 14.0mm
Rated Voltage : 600V
Rated Current : 35A
Withstand Voltage :
AC3000V for 1 minute
Insulation Resistance :
1000MΩ / DC500V
Using Temperature Range :
- 40°C ~ + 105°C
Suitable Electric Wire: 22-12 AWG
Screw Torque Value : M5/2.0Nm

技术要求:
间距: 14.0mm
额定电压: 600V
额定电流: 35A
耐压值: AC3000V/min
绝缘阻抗: 1000MΩ/DC500V
使用条件: -40° C~+105° C
适用线规: 22-12AWG
螺丝扭矩: M5/2.0Nm

	pitch dimension			Nominal dimension					—
	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

7	DG-L-C45/2米	6JH9LDG0001V	1	铝	
6	45AKJ-卡脚	6TB1J300453V	2	PA66-V0	黑色
5	标记条		1	A4腹膜纸	
4	M5*10-12*12螺丝	SPFFB501093V	2P	合金铜	镀镍
3	TA-40A-C导电件	6TB1BDD040AV-1	P	黄铜	镀镍
2	TB1-35-H盖板	6TB1C303050V-H	1	PC	黑色
1	TB1-35-H主体	6TB1E303050V-H	1	PC	黑色
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	CMZ	DATE	2026/07/15	UNITS	mm
CHK.		DATE		SIZE	A4
APP.		DATE		SCALE	1:1
				TITLE	TB1-35XX-H-1Y-00A
上海联捷电气有限公司 Shanghai Elinker Electric CO.,LTD					TB1-35XX-H成品